




**PEN TYPE THERMO-HYGRO-ANEMOMETER**

**NEW + PATENTED**

Unique design to replace with replacement. Patent free

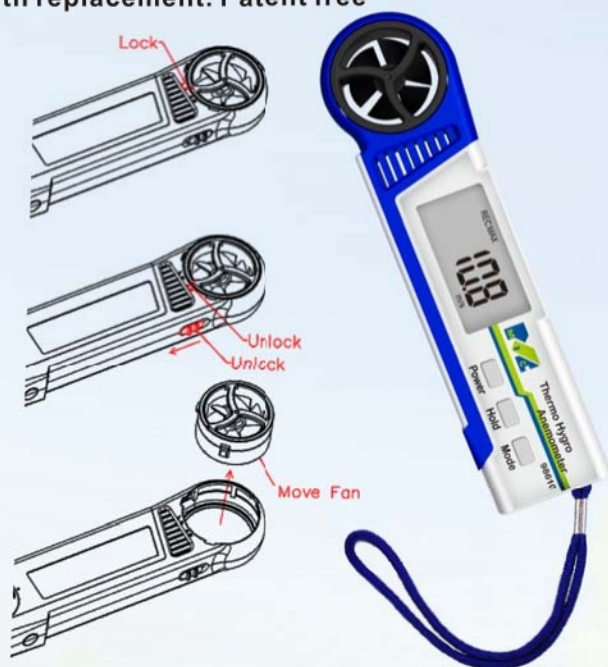

**Features**

- New and compact shape with NEW DESIGN patent
- Small vane may be replaced by pushing mortise device
- Measure wind speed with several units option
- A very useful mini wind speed meter for HVAC engineer to check not only wind speed from air source but also ambient temperature and relative humidity reading
- Quick response. High accuracy
- Meter calibration in house before shipment to ensure good quality wind speed performance.
- Maximum hold and average default is 2 sec. Selectable 5, 10, 13 sec. for average function
- Precision capacitor humidity sensor w/o calibration
- Big LCD display with high resolution
- Enable Auto power off and disable function
- Supplied with a wrist strip to portable around
- Warranty in 2 years

**Standard accessories**

- Meter, Battery, wrist strip, manual and paper box

**Applications**

- HVAC & Home inspection for examining the heating and air conditioning systems.
- Construction & Industrial inspection
- Firefighting monitor wind speed for deploying ladder location
- Outdoors weather monitoring avoid unnecessary heat stroke while training outside



**Specifications**

Spec./ Model no.	98610	98620	98621
Temp.range		-15.0~50.0°C ( 5-122°F)	
Accuracy		±1°C	
Air Velocity range		0.4~20m/s, 80~3937ftm	
Accuracy		±3% of FS	
Wind Unit		m/s,ftm,m/h, kmh,knot	
RH % range	N/A		5~95%
Resolution	N/A		0.1%
Accuracy	N/A	±3% RH (at25°C 10~90%),others 5%	
Dew point Temp./Wet Bulb	N/A	YES , Heat Index , Windchill ( 98621 only)	
Hold		YES	
Maximum/Minimum		YES	
Average		YES	
Power		CR 2032	
Opeating Temp.		0~50°C (32~122°F), <80%RH	
Meter size		152*40*18mm	

