Handi⁺ Industrial





SENSING.

▶ Handi+ Industrial Overview

The **Handi+ Industrial** is everything it's always been and more! Maxtec has improved the $\textbf{Handi+ O}_2 \text{ analyzer to better meet your needs for oxygen analysis. The simple to use,}$ one-touch calibration button, new overmold and calibration reminder combined with the traditional 2 year warranty, auto-off and size make it the best of its class. This product is great for spot-checking ${\rm O}_2$ percentage in various industrial applications.


Part Numbers

Handi+ Industrial R218P15

ACCESSORIES

Barbed Adapter with Tubing	R207P17
15MM Tee Adapter	RP16P02
Flow Diverter	R110P10



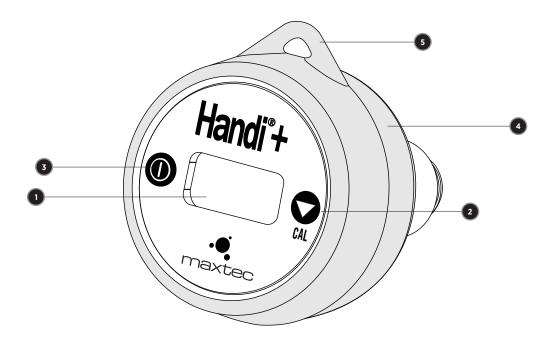

1. LCD Display

Large, easy-to-read, liquid crystal display

2. Calibration

New and improved one-touch calibration button

3. ON/OFF Button

One-touch on and off

4. Protective Wrap

Overmold for extra protection

5. Lanyard Attachment

Small, convenient and portable

Specifications

Resolution/Display:	0.1% - The three digit LCD indicates values between 0.0 - 99.9% Nitrogen
	Over range indicated by one decimal point on display located after the first digit
Response Time:	
Linearity/Accuracy:	
	± 3% actual nitrogen level over full operating temperature range
Power:	. Powered by one internal, non-replaceable, Lithium battery, CR2450. Power on push button automatically shuts off after
	80 seconds time-out. Electronics rated general purpose; not for use in hazardous areas or for use with flammable gases
Battery Life	
Diverter Fitting:	
Temperature:	
Operating Pressure:	
Environmental:	General purpose housing equivalent to NEMA 1. The Handi+ is not waterproof. 0 - 95% RH, non-condensing
Weight:	

