


## DIGITAL / ANALOG HiTESTER SERIES

Multi Meters



A Full Line-up of Digital and Analog Multimeters  
to Suit Any Need

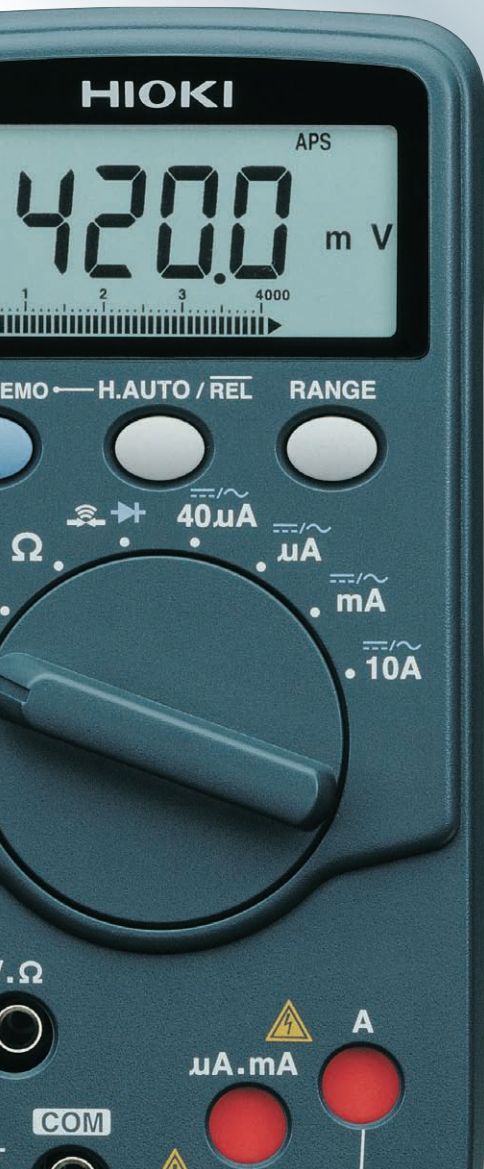

ISO 9001  
JMI-0216



ISO 14001  
JQA-E-90091



[www.hioki.com](http://www.hioki.com)

HIOKI company overview, new products, environmental considerations and other information are available on our website.

From Basic Testing to  
High Performance Analysis

# A Complete HIOKI Digital Multimeter Line-up to Suit Your Needs




## Selection guide

	3255-50	3256-50	3257-50	3805-50	3802-50	3801-50
<b>From Basic Testing to High Performance Analysis</b>						
<b>Basic Specifications</b>						
AC measurement method	Mean	Mean	True RMS	True RMS	True RMS	True RMS
Maximum display count	4199	4200	4200	9999	51000	51000
DCV : Best Accuracy	±0.5 %rdg. ±4dgt.	±0.5 %rdg. ±2dgt.	±0.5 %rdg. ±2dgt.	±0.09 %rdg. ±2dgt.	±0.03 %rdg. ±5dgt.	±0.025 %rdg. ±5dgt.
Dual display	—	—	—	—	●	●
Bar graph display	—	●	●	●	●	●
Display backlight function	—	—	—	●	●	●
CAT IV	—	—	600V	—	600V	600V
CAT III	600V	600V	1000V	600V	1000V	1000V
CAT II	1000V	1000V	—	1000V	—	—
<b>Range</b>						
DC Voltage	419.9 mV to 1000 V	420.0 mV to 1000 V	420.0 mV to 1000 V	999.9 mV to 999.9 V	51.000 mV to 1000.0 V	51.000 mV to 1000.0 V
AC Voltage	419.9 mV to 1000 V	420.0 mV to 1000 V	420.0 mV to 1000 V	999.9 mV to 999.9 V	51.000 mV to 1000.0 V	51.000 mV to 1000.0 V
DC Current	—	42.00µA to 10.00A	42.00µA to 10.00A	999.9 µA to 9.99 A	510.00 µA to 10.000A	510.00 µA to 10.000 A
AC Current	CLAMP (ACA) function*1 10A to 1000A	42.00µA to 10.00A	42.00µA to 10.00A	999.9 µA to 9.99 A	510.00 µA to 10.000 A	510.00 µA to 10.000 A
Resistance (*2Conductance)	419.9Ω to 41.99MΩ	420.0Ω to 42.00MΩ	420.0Ω to 42.00MΩ	999.9 Ω to 99.99 MΩ	510.00 Ω to 51.000 MΩ (*2 510.00nS)	510.00 Ω to 510.00 MΩ (*2 510.00nS)
Capacitance	—	—	—	9.999 µF to 9.999 mF	9.999 nF to 99.99 mF	9.999 nF to 99.99 mF
AC+DC	—	—	—	—	—	●
Temperature	—	—	—	●	●	●
Frequency	—	●	●	●	●	●
Frequency counter	—	—	—	—	—	●
DUTY ratio	—	—	●	—	●	●
Pulse width	—	—	—	—	●	●
Contact Check Buzzer	●	●	●	●	●	●
<b>Function</b>						
Peak hold	—	—	—	—	●	●
Recording	—	●	●	●	●	●
Refresh hold (HOLD AUTO)	—	●	●	●	●	●
Trigger hold (HOLD)	●	●	●	●	●	●
Relative (REL)display	—	●	●	●	●	●
Percentage display (4-20mA/0-20mA)	—	—	—	●	●	●
Temperature difference between 2 points	—	—	—	●	—	—
Harmonic Ratio	—	—	—	●	—	—
Decibel display (dbm/dbv)	—	—	—	—	●	●
Pulse output	—	—	—	—	—	●



\*1 Clamp-on probe : Option

CAT	Test lead L9207-10/L9207-30	
Sleeve attached	CAT IV 600V CAT III 1000V	When the CAT (measurement category) rating of the main unit is lower than that of test leads, the CAT of the main unit takes precedence. <b>When measuring in a CAT IV or CAT III environment, be sure to attach the sleeve to the test leads.</b>
No Sleeve attached	CAT II 1000V	

## Selection guide (Pocket size DMM)

	3244-60	3245-60	3246-60
			
<b>Basic Specifications</b>			
AC measurement method	Mean	Mean	Mean
Maximum display count	4199	4199	4199
Display backlight function	—	—	●
Sleeve attached	CAT IV	—	300V
	CAT III	300V	600V
No sleeve attached	CAT II	600V	600V
<b>Function &amp; Range</b>			
DC Voltage	419.9 mV to 500 V	419.9 mV to 600 V	419.9 mV to 600 V
AC Voltage	4.199 V to 500 V	4.199 V to 600 V	4.199 V to 600 V
Resistance	419.9Ω to 41.99MΩ	419.9Ω to 41.99MΩ	419.9Ω to 41.99MΩ
Contact Check Buzzer	●	●	●

## ● Analog Multimeters

3030-10	3008
	
Basic type	Use for industrial power lines
<b>DROP PROOF</b>	<b>DROP PROOF</b>

## ● SAFETY HiTESTER 3258



Measure voltage on insulated electric cables

Refer to page 8 for details ▶

## New product information

### New insulated test pin sleeves prevents short-circuits

Conforms to safety standard  
IEC61010-031 (revised) for hand-held probes



Sleeve attached      No Sleeve attached

**What are the new and additional requirements of the international safety standards?**

1. "Exposed metal part must be 4mm or shorter" (Previously, 19mm max.) for CAT III and IV environments to prevent short-circuits from occurring.
2. Double-coating with different colors enables you to identify the wear condition of the test leads. (Previously, single-coated)

### Detachable!

When a sleeve is not attached, the test leads can only be used in a CATII environment.



\*When used in CATIII environments, test pin sleeves are required.  
Included as a standard accessory  
(This sleeve cannot be attached to previous products)

No sleeves attached to the tip of test leads?

**DANGER of short-circuit accident!!**

Previous model



With a sleeve attached to the tip of test leads, short-circuit accidents can be prevented.


NEW!



## Measurement categories (Overvoltage categories)

To ensure safe operation of measurement products, IEC 61010 establishes safety standards for various electrical environments, categorized as CAT I to CAT IV, and called measurement categories. These are defined as follows.

- CAT I** : Secondary electrical circuits connected to an AC electrical outlet through a transformer or similar device.
- CAT II** : Primary electrical circuits in equipment connected to an AC electrical outlet by a power cord (portable tools, household appliances, etc.)
- CAT III** : Primary electrical circuits of heavy equipment (fixed installations) connected directly to the distribution panel, and feeders from the distribution panel to outlets.
- CAT IV** : The circuit from the service drop to the service entrance, and to the power meter and primary overcurrent protection device (distribution panel).

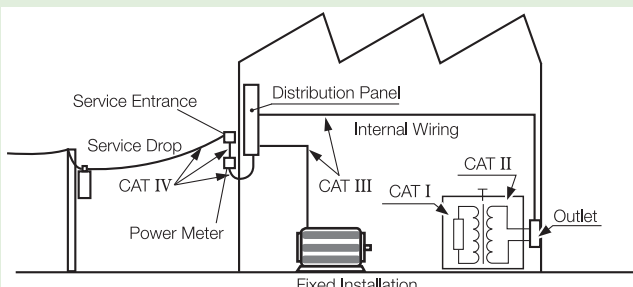

Higher-numbered categories correspond to electrical environments with greater momentary energy, so a measurement product designed for CAT III environments can endure greater momentary energy than one designed for CAT II. Using a measurement product in an environment designated with a higher-numbered category than that for which the product is rated could result in a severe accident, and must be carefully avoided.

Never use a CAT I measuring product in CAT II, III, or IV environments.

The measurement categories comply with the Overvoltage Categories of the IEC60664 Standards.

# Multi-function DMM SERIES

## DIGITAL HiTESTER 3801-50 3802-50

### High-precision, high-resolution, and multi-functional handy DMMs

- Dual display shows different two parameters simultaneously
- Useful backlight function for use in dark locations.
- Record maximum, minimum and average values into the internal memory
- USB communication function for PC measurement (optional)
- AC+DC measurement mode / pulse output function (3801-50 only)

#### Main Differences

	3801-50	3802-50
Best DC Accuracy	±0.025 %rdg. ±5dgt.	±0.03 %rdg. ±5dgt.
AC+DC	●	—
Frequency counter	●	—
Pulse output	●	—



True RMS

USB 1.1  
OPTION



3801-50

#### Pulse Output Function (3801-50 only)


Use as a control or standard signal source for measurement systems or electronic circuits.

Pulse frequency and duty cycle (or pulse width) can be specified.

- Frequency settings: 0.5, 1, 2, 5, 10, 15, 20, 25, 30, 40, 50, 60, 75, 80, 100, 120, 150, 200, 240, 300, 400, 480, 600, 800, 1200, 1600, 2400 or 4800 Hz
- Duty cycle setting range: 0.39% to 99.60%
- Pulse width settings: 1/frequency
- Amplitude: fixed 2.8 V
- Output impedance: 3.5 kΩ or less

#### 3801-50 / 3802-50

Function	Range	Best Accuracy	
		3801-50	3802-50
DC Voltage	51.000 mV/ 510.00 mV/ 1000.0 mV 5.1000 V/ 51.000 V/ 510.00 V/ 1000.0 V	±0.025 %rdg. ±5dgt.	±0.03 %rdg. ±5dgt.
AC Voltage	51.000 mV/ 510.00 mV/ 1000.0 mV 5.1000 V/ 51.000 V/ 510.00 V/ 1000.0 V	±0.4 %rdg. ±25dgt.	±0.6 %rdg. ±25dgt.
DC Current	510.00 μA/ 5100.0 μA/ 51.000 mA/ 510.00 mA 5.1000 A/ 10.000 A	±0.05%rdg. ±25dgt.	±0.1%rdg. ±25dgt.
AC Current	510.00 μA/ 5100.0 μA/ 51.000 mA/ 510.00 mA 5.1000 A/ 10.000 A	±0.7%rdg. ±20dgt.	±0.8%rdg. ±20dgt.
Resistance	510.00 Ω/ 5.1000 kΩ/ 51.000 kΩ/ 510.00 kΩ 5.1000 MΩ/ 51.000 MΩ (3801-50 only 510.00 MΩ)	±0.05%rdg. ±5dgt.	±0.08%rdg. ±5dgt.
Conductance	510.00 nS	±1.0%rdg. ±10dgt.	±1.0%rdg. ±10dgt.
Continuity	Threshold value : Buzzer sounds less than 1000 counts for each range.		
Capacitance	9.999 nF/ 99.99 nF/ 999.9nF	±1.5%rdg. ±5dgt.	±1.5%rdg. ±5dgt.
	9.999 μF/ 99.99 μF/ 999.9 μF/ 9.999mF/ 99.99 mF		
Frequency	99.999 Hz/ 999.99 Hz	±0.02%rdg. ±3dgt.	±0.02%rdg. ±3dgt.
	9.9999 kHz/ 99.999 kHz/ 999.99kHz		

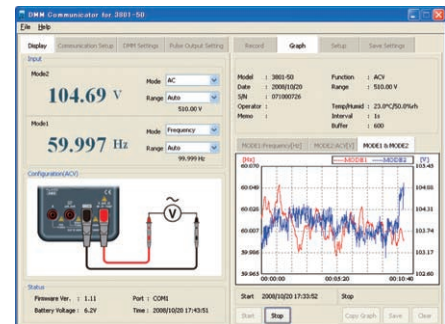

#### Temperature

Thermocouple Type	Range	Accuracy
K	-200.0 to 1372.0 °C (-328 to 2502 °F)	±0.3%rdg. ±3 °C
J (3801-50 only)	-210.0 to 1200.0 °C (-346 to 2192 °F)	(±0.3%rdg. ±6 °F)

Accuracy does not include temperature probe error

Response time: 60 minutes (main unit reference contact temperature compensation)

**Dimensions** : Approx. 100W × 202H × 57D mm (3.94"W × 7.95"H × 2.24"D) including protective holster

**Mass** : Approx. 680 g (24.0 oz.) including protective holster and battery

#### Accessories

TEST LEAD (1)  
Holster (1)

#### Options

TEST LEAD	L9207-10	CLIP TYPE LEAD	*9618
CARRYING CASE	3853	(for capacitance measurement)	
COMMUNICATION PACKAGE (USB)	3856-02		
TEMPERATURE PROBE	*9180 to *9183		
TEMPERATURE PROBE	9472 to 9476		

\*Note: Non-CE mark product

#### COMMON OPTIONS

3801-50 / 3802-50 / 3805-50

#### COMMUNICATION PACKAGE 3856-02 (USB)

Includes application software and USB cable for transferring test data to the PC. User-customizable and programmable to add remote control functions.

- Operating environment: Windows 2000, XP, Vista\*
- Acquisition interval: 1 second to 99 hours
- Transfer: Up to 65,525 data points
- Other functions: Header settings, save files in CSV format

\*Windows 2000, XP, Vista are registered trademarks of Microsoft Corp., USA

# Multi-function DMM SERIES

## DIGITAL HiTESTER 3805-50

**High-precision, high-resolution, and multi-functional handy DMMs**

- Record maximum / minimum / average value
- Relative value display
- Simple performance and low cost, Basic accuracy  $\pm 0.09\%$
- PC communication via USB (using optional accessories)
- For Power line distortion check (Harmonic distortion % display)
- Temperature scanning function (T1, T2, T1-T2)

### Temperature

Thermocouple Type	Range	Accuracy
K	-40 to 1372°C (-40 to 2502°F)	$\pm 0.3\%$ rdg, $\pm 3^\circ\text{C}$
J	-40 to 1200°C (-40 to 2192°F)	$(\pm 0.3\%$ rdg, $\pm 6^\circ\text{F})$

Accuracy does not include temperature probe error. Response time: 60 minutes (main unit reference contact temperature compensation time)

### 3805-50

Function	Range	Best Accuracy
		3805-50
DC Voltage	999.9 mV/ 9.999 V/ 99.99 V/ 999.9 V	$\pm 0.09\%$ rdg, $\pm 2$ dgt.
AC Voltage	999.9 mV/ 9.999 V/ 99.99 V/ 999.9 V	$\pm 1.0\%$ rdg, $\pm 5$ dgt.
DC Current	999.9 $\mu\text{A}$ / 9999 $\mu\text{A}$ / 99.99 mA/ 999.9 mA/ 9.99 A	$\pm 0.1\%$ rdg, $\pm 3$ dgt.
AC Current	999.9 $\mu\text{A}$ / 9999 $\mu\text{A}$ / 99.99 mA/ 999.9 mA/ 9.99 A	$\pm 1.0\%$ rdg, $\pm 5$ dgt.
Resistance	999.9 $\Omega$ / 9.999 k $\Omega$ / 99.99 k $\Omega$ / 999.9 k $\Omega$ / 9.999 M $\Omega$ / 99.99 M $\Omega$	$\pm 0.3\%$ rdg, $\pm 3$ dgt.
Capacitance	9.999 $\mu\text{F}$ / 99.99 $\mu\text{F}$ / 999.9 $\mu\text{F}$ / 9.999mF	$\pm 2.0\%$ rdg, $\pm 5$ dgt.
Frequency	9.999 Hz/ 99.99 Hz/ 999.9 Hz/ 9.999 kHz/ 99.99 kHz/ 200.0 kHz	$\pm 0.03\%$ rdg, $\pm 3$ dgt.
Continuity	Buzzer sounds at a resistance equivalent to or less than 100 counts ( $\pm 5\%$ ) for each range.	
Diode	2.100V	$\pm 0.3\%$ rdg, $\pm 2$ dgt.

**Dimensions** : Approx. 83W  $\times$  178H  $\times$  58D mm (3.27"W  $\times$  7.01"H  $\times$  2.28"D)  
including protective holster, not including protrusions

**Mass** : Approx. 400g (14.1 oz.) including protective holster and battery

### Accessories

TEST LEAD (1)  
Holster (1)

### Options

TEST LEAD L9207-10  
CARRYING CASE 3853  
COMMUNICATION PACKAGE (USB) 3856-02

TEMPERATURE PROBE \*9180 to \*9183  
TEMPERATURE PROBE 9472 to 9476

CLIP TYPE LEAD \*9618  
(for capacitance measurement)

\*Note: Non-CE mark product



3805-50

## DIGITAL HiTESTER 3255-50

**Tough for use on industrial power lines**

- Built-in current limiter and fuse capable of withstanding 1000 V to prevent short-circuit accidents
- Wide range, maximum reading 4199 digit
- Two-terminal configuration eliminates the need for probe reconnections
- Industrial grade test leads for enhanced safety

Function	Range	Best Accuracy
DC Voltage	419.9 mV/ 4.199 V/ 41.99 V/ 419.9 V/ 1000 V	$\pm 0.5\%$ rdg, $\pm 4$ dgt.
AC Voltage	419.9 mV/ 4.199 V/ 41.99 V/ 419.9 V/ 1000 V	$\pm 1.2\%$ rdg, $\pm 4$ dgt.
AC Current	10A to 1000A, 7 ranges with optional clamp	$\pm 2.0\%$ rdg, $\pm 4$ dgt.
Resistance	419.9 $\Omega$ / 4.199 k $\Omega$ / 41.99 k $\Omega$ / 419.9 k $\Omega$ / 4.199 M $\Omega$ / 41.99 M $\Omega$	$\pm 0.7\%$ rdg, $\pm 4$ dgt.
Continuity	419.9 $\Omega$ *Buzzer sounds at approx 50 $\Omega$ $\pm$ 40 $\Omega$ or less	
Diode check	Yes(3.4V/850 $\mu\text{A}$ max. open terminal voltage)	$\pm 1.0\%$ rdg, $\pm 2$ dgt.

**Dimensions** : Approx. 70W  $\times$  145H  $\times$  31D mm (2.76"W  $\times$  5.71"H  $\times$  1.22"D)

**Mass** : Approx. 210 g (7.4 oz.)

### Accessories

TEST LEAD (1)  
CARRYING CASE 9371

### Options

TEST LEAD L9207-10  
CLAMP ON PROBE 9010-50 (AC500A)  
CRAMP ON PROBE 9132-50 (AC1000A)  
CONVERSION ADAPTER 9704 (Input: BNC., Output: banana)



# Multi-function DMM SERIES

## DIGITAL HiTESTER 3256-50/-51 3257-50/-51

### Terminal shutter interlock mechanism

- Terminal shutter interlock mechanism exposes only the correct terminals for connection in the currently selected function
- Wide range, maximum reading 4200 digit
- High-speed response, bar graph display
- Conforms with IEC1010
- Auto-hold function automatically displays voltage or current value and resistance value

#### Model

3256-50 (MEAN)	with carrying case
3256-51 (MEAN)	with holster
3257-50 (True RMS)	with carrying case
3257-51 (True RMS)	with holster

3256-51/3257-51  
Scheduled to be discontinued



3256-51

3256-50

### Fail-safe!

Shutter mechanism prevents incorrect test lead connection



Voltage ranges  
Only V and COM terminals open



10A range  
Only A and COM terminals open

\* The above photograph shows a demonstration model with a transparent cover.



### 3256-50 Only

- Check for live lines safely and easily




Buzzer sounds and flashing

In the AC V range, the 3256-50 can be used to check whether power lines are live. When the sensitivity level is set to 4 and the test head is placed near a live power line, the built-in buzzer sounds and a display indicator lights.

### 3257-50 Only

- Analyze pulse control signals

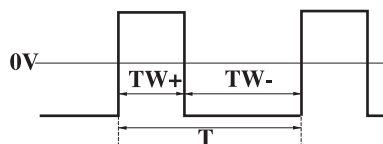

The ratio between pulse width (TW + or TW-) and pulse recursion cycle (T) is displayed as a percentage.

- Display range : 5 to 95%
- Accuracy : 10Hz to 1kHz ;  $\pm 1.0\% \text{rdg.} \pm 15 \text{dgt.}$   
1kHz to 10kHz ;  $\pm 1.0\% \text{rdg.} \pm 50 \text{dgt.}$

Accuracy rating pertains to a square wave of 5Vp-p.

Function	Range	Best Accuracy
DC Voltage	420.0 mV/ 4.200 V/ 42.00 V/ 420.0 V/ 1000 V	$\pm 0.5\% \text{rdg.} \pm 2 \text{dgt.}$
AC Voltage	420.0 mV/ 4.200 V/ 42.00 V/ 420.0 V/ 1000 V	$\pm 1.2\% \text{rdg.} \pm 3 \text{dgt.}$
DC Current	42.00 $\mu\text{A}$ / 420.0 $\mu\text{A}$ / 4200 $\mu\text{A}$ / 42.00 mA/ 420.0 mA/ 10.00 A	$\pm 1.5\% \text{rdg.} \pm 4 \text{dgt.}$
AC Current	42.00 $\mu\text{A}$ / 420.0 $\mu\text{A}$ / 4200 $\mu\text{A}$ / 42.00 mA/ 420.0 mA/ 10.00 A	$\pm 2.5\% \text{rdg.} \pm 5 \text{dgt.}$
Resistance	420.0 $\Omega$ / 4.200 k $\Omega$ / 42.00 k $\Omega$ / 420.0 k $\Omega$ / 4.200 M $\Omega$ / 42.00 M $\Omega$	$\pm 0.7\% \text{rdg.} \pm 2 \text{dgt.}$
Frequency	199.99 Hz/ 1999.9Hz/ 19.999kHz/ 199.99kHz/ 500.0kHz	$\pm 0.02\% \text{rdg.} \pm 1 \text{dgt.}$
Continuity	420.0 $\Omega$ *Buzzer sounds at approx 50 $\Omega$ ± 40 $\Omega$ or less	
Diode	2.00V	$\pm 5.0\% \text{rdg.} \pm 2 \text{dgt.}$

**Dimensions** : Approx. 76W × 167H × 33D mm (2.99"W×6.57"H×1.30"D)

**Mass** : Approx. 260 g (9.2 oz.)

#### Accessories

TEST LEAD (1)  
Holster (3256-51, 3257-51)  
CARRYING CASE 9378 (3256-50, 3257-50)

#### Options

TEST LEAD L9207-10  
HIGH-VOLTAGE PROBE \*9014  
CARRYING CASE (for 3256-51, 3257-51) 3853

\*Note: Non-CE mark product

# POCKET SIZE DMM SERIES

## CARD HiTESTER 3244-60

**Compact! Palm size body, Less than 1cm thin!**

- Better contact test leads with 15mm gold-plated tip pin
- Only 9.5 mm (0.37 in) thick and 60 g (2.1 oz) in weight
- Full auto-ranging function and automatic power saving function
- Overload protection to 500 V at resistance or continuity functions

Function	Range	Best Accuracy
DC Voltage	420.0 mV/ 4.200 V/ 42.00 V/ 420.0 V/ 500 V	±0.7 %rdg. ±4dgt.
AC Voltage	4.200 V/ 42.00 V/ 420.0 V/ 500 V	±2.3 %rdg. ±8dgt.
Resistance	420.0 Ω/ 4.200 kΩ/ 42.00 kΩ/ 420.0 kΩ/ 4.200 MΩ/ 42.00 MΩ	±2.0 %rdg. ±4dgt.
Continuity	420.0 Ω *Buzzer sounds at approx 50Ω± 40Ω or less	±2.0 %rdg. ±4dgt.

Dimensions :Approx. 55W × 109H × 9.5D mm (2.17"W×4.29"H×0.37"D)  
Mass :Approx. 60 g (2.1 oz.)



CE

### Accessories

Hard case (1)  
Sleeve (red 1, black 1)

## SOLAR HiTESTER 3245-60

**Environmentally-friendly DMM**

- Hybrid power system incorporates both a solar-charged main battery and a backup battery
- Pocket-sized, CATIII (600V) and CATIV (300V) conformance (when test pin sleeves are attached)
- Neat test probe storage in the back of the unit

Function	Range	Best Accuracy
DC Voltage	420.0 mV/ 4.200 V/ 42.00 V/ 420.0 V/ 600 V	±1.3 %rdg. ±4dgt.
AC Voltage	4.200 V/ 42.00 V/ 420.0 V/ 600 V	±2.3 %rdg. ±8dgt.
Resistance	420.0 Ω/ 4.200 kΩ/ 42.00 kΩ/ 420.0 kΩ/ 4.200 MΩ/ 42.00 MΩ	±2.0 %rdg. ±4dgt.
Continuity	420.0 Ω *Buzzer sounds at approx 50Ω± 40Ω or less	±2.0 %rdg. ±4dgt.

Dimensions :Approx. 60W × 135H × 23D mm (2.36"W×5.31"H×0.91"D)  
Mass :Approx. 140 g (4.9 oz.)

New



CE

### Accessories

Sleeve (red 1, black 1)

## PENCIL HiTESTER 3246-60

**Pencil-type DMM with LED Light**

In addition to being compact, this pencil-type tester comes with auto-range and data hold functions for incredibly easy measurement of electrical and electronic circuitry.

- Test lead and main unit in a single body
- Overload protection to 600 V at resistance or continuity functions
- LED light brightly illuminates test points

### Backlight LCD



Function	Range	Best Accuracy
DC Voltage	420.0 mV/ 4.200 V/ 42.00 V/ 420.0 V/ 600 V	±1.3 %rdg. ±4dgt.
AC Voltage	4.200 V/ 42.00 V/ 420.0 V/ 600 V	±2.3 %rdg. ±8dgt.
Resistance	420.0 Ω/ 4.200 kΩ/ 42.00 kΩ/ 420.0 kΩ/ 4.200 MΩ/ 42.00 MΩ	±2.0 %rdg. ±4dgt.
Continuity	420.0 Ω *Buzzer sounds at approx 50Ω± 40Ω or less	±2.0 %rdg. ±4dgt.
Diode Check	Judgment only (0.3V to 2.0V)	

Dimensions :Approx. 30W × 182H × 26.5D mm (1.18"W×7.17"H×1.04"D)  
Mass :Approx. 80 g (2.8 oz.)

New



CE

### Accessories

Sleeve (red 1, black 1)

Penlight



Penlight brightly illuminates test points

# Analog Multimeters and Voltage Meters

## HITESTER 3030-10

Basic tester with improved safety features

- Protected against transient voltages up to 250 V AC, preventing electric shock accidents before they can happen
- Drop proof design withstands dropping onto a concrete floor from a height of 1 meter
- Temperature measurement support (with optional probes)



### Options

TEST LEAD L9207-30  
THERMISTOR TEMPERATURE PROBE 9021-01  
(for temperature measurement)

\*HIGH-VOLTAGE PROBE 9017 up to 30 kV DC

\*Note: Non-CE mark product



CAT III 600V



### SPECIFICATIONS

<b>DC Voltage range</b>	0.3 V (16.7 k-ohm/V), 3/12/30/120/300/600 V (20 k-ohm/V) Accuracy: $\pm 2.5\%$ f.s.
<b>AC Voltage range</b>	12 V (9 k-ohm/V) Accuracy: $\pm 4\%$ f.s. 30/120/300/600 V (9 k-ohm/V) Accuracy: $\pm 2.5\%$ f.s. Average rectifier effective value
<b>Resistance range</b>	0 to 3 k-ohm (center scale 30 ohm), R $\times 1$ , R $\times 10$ , R $\times 100$ , R $\times 1$ k $\pm 3\%$ of scale length
<b>DC Current range</b>	60 $\mu$ A/30 m/300 mA (300 mV internal voltage drop) Accuracy: $\pm 3\%$ f.s.
<b>Other functions</b>	Battery check: 0.9 to 1.8 V, load resistance 10 ohm Temperature: -20 to 150 °C (Thermistor Temperature Probe 9021-01 is necessary, sold separately)
<b>Safety considerations</b>	Complies with EN61010 Installation Category III (anticipated transient overvoltage 6000 V), Pollution Degree 2
<b>Power supply</b>	R6P(AA) $\times 2$ batteries
<b>Dimensions, mass</b>	95 mm(3.74 in)W $\times$ 141 mm(5.55 in)H $\times$ 39 mm(1.54 in)D, 280 g (9.9 oz)
<b>Accessories</b>	TEST LEAD (1), fuse (1), CARRYING CASE 9390 (1)

To prevent electric shock, a fuse for protection up to a commercial power supply of 250V is integrated into the internal circuitry of Model 3030-10. Please note that the fuse is not intended for preventing damage to the unit.

## MULTI TESTER 3008

For maintenance service

- Designed for maintenance of high power lines
- Drop proof design withstands dropping onto a concrete floor from a height of 1 meter
- High-power fuse protects up to 50,000A
- Supply current limiting resistance of 10-ohm restricts short circuit current



### SPECIFICATIONS

<b>DC Voltage range</b>	6/30/60/300/600 V (20 k-ohm/V) Accuracy: $\pm 2.5\%$ f.s.
<b>AC Voltage range</b>	6/30/150/300/600 V (10k-ohm/V) Accuracy: $\pm 2.5\%$ f.s. Average rectifier effective value
<b>Resistance range</b>	0 to 10 k-ohm (center scale 100 ohm), R $\times 1$ , R $\times 10$ , R $\times 100$ $\pm 3\%$ of scale length
<b>Safety considerations</b>	Protection: 1A rated, guaranteed current 50,000A high-power fuse and 10 ohm resistor for restricting short circuit current
<b>Power supply</b>	R6P(AA) $\times 2$ batteries
<b>Dimensions, mass</b>	94 mm(3.70 in)W $\times$ 134 mm(5.28 in)H $\times$ 56 mm(2.20 in)D, 350 g (12.3 oz)
<b>Accessories</b>	TEST LEAD 9060 (1), fuse (1), CARRYING CASE (1)



## SAFETY HITESTER 3258

Voltage measurement safety assured by non Metallic contact testing

- Non-Metallic contact for optimum safety
- Capture the voltage value of covered electric wires
- Also ideal for metallic busbars and terminals
- Optimized for 400V AC circuits



True RMS

Measure voltage on insulated electric cables

### SPECIFICATIONS

<b>AC Voltage range (40 to 66Hz)</b>	420.0 V	$\pm 1.5\%$ rdg. $\pm 5$ dgt.
	600 V	380 V to 480 V 481 V to 600 V
<b>Objects of Measurement</b>	Insulated conductors (IV or CV equivalent, min. 100 mm <sup>2</sup> x-section), bare metal conductors Note: Not usable on shielded conductors.	
<b>Power supply</b>	LR6 alkaline battery $\times 6$	
<b>Dimensions, mass</b>	83W $\times$ 178H $\times$ 58D mm (2.01"W $\times$ 10.83"H $\times$ 1.48"D) 670 g (23.6 oz)	
<b>Accessories</b>	Soft carrying case (1)	

Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

# HIOKI

HIOKI E. E. CORPORATION

#### HEAD OFFICE :

81 Koizumi, Ueda, Nagano, 386-1192, Japan  
TEL +81-268-28-0562 / FAX +81-268-28-0568  
http://www.hioki.co.jp / E-mail: os-com@hioki.co.jp

#### HIOKI USA CORPORATION :

6 Corporate Drive, Cranbury, NJ 08512 USA  
TEL +1-609-409-9109 / FAX +1-609-409-9108  
http://www.hiokiusa.com / E-mail: hioki@hiokiusa.com

**HIOKI (Shanghai) Sales & Trading Co., Ltd. :**  
1608-1610, Shanghai Times Square Office, 93 Huai Hai Zhong Road  
Shanghai, P.R.China POSTCODE: 200021  
TEL +86-21-63910090/63910092 FAX +86-21-63910360  
http://www.hioki.cn / E-mail: info@hioki.com.cn  
**Beijing Office :** TEL +86-10-84418761/84418762  
**Guangzhou Office :** TEL +86-20-38392673/2676  
**HIOKI SINGAPORE PTE. LTD. :**  
33 Ubi Avenue 3, #03-02 Vertex, Singapore 408868  
TEL +65-6634-7677 FAX +65-6634-7477  
E-mail: info@hioki.com.sg  
**HIOKI INDIA PRIVATE LIMITED :**  
Khandela House, 24 Gulmohar Colony Indore 452 018 (M.P.), India  
TEL +91-731-4223901, 4223902 FAX +91-731-4223903  
http://www.hioki.in / E-mail: info@hioki.in

DISTRIBUTED BY