SIEMENS 1962



QPM2102D

QPM2160D, QPM2162D

QPM1100, QPM2100, QPM2102

QPM2160, QPM2180

QPM11..

Duct Air Quality Sensors

QPM21..

- Maintenance-free CO₂ sensing element (depending on the type) based on optical infrared absorption measurement (NDIR¹)
- Or with VOC²⁾ sensing element, based on a heated tin dioxide semiconductor
- CO₂ temperature (active or passive) and CO₂ humidity-temperature multisensor
- No recalibrations required
- Operating voltage AC 24 V or DC 15...35 V
- Signal outputs DC 0...10 V or DC 0...5 V or 4...20 mA adjustable
- Selectable passive temperature sensing element
- 1) NDIR = Non dispersive infrared
- 2) VOC = volatile organic compounds (also called mixed gas)

Use

In air ducts of ventilation and air conditioning plant to enhance room comfort and to optimize energy consumption by providing demand-controlled ventilation. The sensor acquires:

- CO₂ concentrations
- VOC concentrations as an indication of odors in the duct air, such as tobacco smoke, body odor, or material fumes
- The relative humidity of the duct air
- The duct air temperature

Sensors QPM1100 and QPM21... can be used as a:

- Control sensor in the supply or extract air duct
- Transmitter for building automation and control systems and / or display units (QPM21...D only).

Typical use:

Acquisition of CO₂ and VOC concentrations:
 In party rooms, lounges, fair pavillions and exhibition halls, restaurants, canteens, shopping malls, sports gymnasiums, sales rooms, and conference rooms

Acquisition of CO₂ concentrations:
 In ventilation plant of rooms with varying occupancy levels where smoking is prohibited, such as museums, theatres, movie theatres, auditoriums, office spaces and school rooms

Important!

- The QPM21... sensors are not suited for use as safety devices, such as gas or smoke warning devices!
- The sensors must not be used outdoors!

Type summary

Type reference	CO ₂ measuring range	VOC time constant	Temperature measuring range	Humidity measuring range	Measured value display
QPM1100		Slow (R1)			
		Normal (R2)			
-		Fast (R3)			
QPM2100	02000 ppm				no
QPM2102	02000 ppm	Slow (R1)			
		Normal (R2)			no
		Fast (R3)			
QPM2102D	02000 ppm	Low (R1)			
		Normal (R2) High (R3)			yes
QPM2160	02000 ppm		050 °C / -35+35 °C		no
QPM2160D	02000 ppm		050 °C / -35+35 °C		yes
QPM2162	02000 ppm		050 °C / -35+35 °C	0100 %	no
QPM2162D	02000 ppm		050 °C / -35+35 °C	0100 %	Yes
QPM2180	02000 ppm		Depending on connected sensing element		no

Ordering

When ordering, please give name and type reference, e.g.:

Duct air quality sensor QPM2102

The sensor is supplied complete with mounting flange and cable entry gland M16.

Equipment combinations

All systems and devices capable of processing the following sensor signals:


- DC 0...10 V or DC 0...5 V or 4...20 mA
- passive sensor signals for sensor QPM2180

CO₂ concentrations

The SymaroTM air quality sensors acquire the CO_2 concentration by infrared absorption measurement (NDIR).

The resulting output signal of DC 0...10 V or DC 0...5 V or 4...20 mA is proportional to the CO_2 content of the ambient air.

Function diagram CO₂ (output X1)




VOC concentration (QPM1100)

SymaroTM air quality sensors determine the mixed gas concentration (VOC) using metal-oxide semiconductor sensing elements. The sensors measure precisely at all times and with no maintenance and recalibration required thanks to an integrated compensation mechanism, saving service costs.

The sensor provides a DC 0...10 V or DC 0...5 V or 4...20 mA output signal proportionate to the VOC content of the ambient air.

Diagram VOC (Output X1)



Time constant "VOC signal"

Select the time constant for VOC measurement by limiting the maximum slew rate for the VOC signal. The jumper X130 (measuring range) fine tunes the time constant for VOC ventilation demand.

The center position (R2) produces a normal slew rate of max. 10% change to the VOC signal per minute (factory setting). The other 2 position reduce (R1, 2.5% VOC/min) or increase (R3, 40% VOC/min) the maximum slew rate. A smaller slew rate (R1) filters out short-term VOC concentration peaks, e.g. caused by a highly perfumed person passing by. The sensor reacts immediately and quickly to changes in VOC concentration at the higher slew rate (R3).


Time constant t_{63} selected by jumper X130 corresponds to <13 min (R1), <3.5 min (R2), or <1 min (R3) for a sudden change to 50% VOC.

CO₂/VOC concentration (QPM2102 and QPM2102D) The sensor acquires and evaluates the CO_2 / VOC concentration and transforms it to a ventilation demand signal.

It represents the result of maximum selection of the CO_2 measuring signal and the filtered VOC measuring signal. With maximum selection, the 2 demand signals are compared and delivered as the common air quality demand.

The ventilation demand signal is delivered via output X2 as a DC 0...10 V or 0...5 V or 4...20 mA signal to be fed to the ventilation controller.

Ventilation demand diagram (output X2)



Relative humidity (QPM2162 and QPM2162D)

The sensor acquires the relative humidity in the air duct with a capacitive humidity sensing element whose capacitance changes as a function of the relative humidity. An electronic measuring circuit converts the signal from the sensing element to a continuous DC 0...10 V or DC 0...5 V or 4...20 mA signal, corresponding to a relative humidity range of 0...100 %.

Temperature active (QPM216...)

The sensor acquires the temperature in the air duct with a sensing element whose electrical resistance changes as a function of the temperature.

The change is converted to an active DC 0...10 V or DC 0...5 V or 4...20 mA output signal (\triangleq 0...50 °C or -35...+35 °C).

Temperature passive (QPM2180)

The sensor measures the room temperature using a sensing element where electrical resistance changes with the temperature of the ambient air.

The sensing element is on the device's rear side and connected at the appropriate connection terminals.


The following sensing elements are included with the device:


- LG-Ni1000
- Pt1000
- Pt100
- NTC 10kOhm

Sensing element


LG-Ni 1000


Characteristic curve:







Pt 1000 (KI. B) Characteristic curve:







Pt 100 (Kl. B) Characteristic curve:









Key R Resistance in Ohm

9 Temperature in Celsius

 $\Delta \vartheta$ Temperature differential in Kelvin

Mechanical design

The duct air quality sensor consists of housing, printed circuit board, connection terminals, mounting flange and immersion rod with measuring probe.

The 2-sectional housing is comprised of base and removable cover (without display: snap-on design; with display: screwed fastening). The measuring circuit and the setting elements are located on the printed circuit board inside the cover, the connection terminals on the base.


The humidity and temperature sensing elements are located at the end of the measuring probe and are protected by a filter cap.


Cable entry is made via the cable entry gland M16 (IP 54) supplied with the sensor, which screws into the housing.

Immersion rod and housing are made of plastic and are rigidly connected.

The sensor is fitted with the mounting flange supplied with the sensor. The flange is to be placed over the immersion rod and then secured in accordance with the required immersion length.

Setting elements ...





rest function active				
X130	X1	X2	Х3	
000	0 V / 0 V	2.5 V / 5 V	5 V / 10 V	
	4 mA	12 mA	20 mA	
000	2.5 V / 5 V	5 V / 10 V	0V / 0V	
	12 mA	20 mA	4 mA	
0 0 0	5 V / 10 V	0 V / 0 V	2.5 V / 5 V	
	20 mA	4 mA	12 mA	
0 0 0	2.5 V / 5 V	2.5 V / 5 V	2.5 V / 5 V	
	12 mA	12 mA	12 mA	

The setting elements are located inside the cover

...for the measuring range with QPM2100

The different vertical plug positions have the following meaning:

with QPM1100, QPM2102 and QPM2102D

• For the CO₂ measuring range:

• For VOC weighting:

Shorting plug in the left position (R1)

Shorting plug in the mid position (R2)

VOC sensitivity " slow "

Shorting plug in the mid position (R2)

VOC sensitivity "normal" (factory setting)

0...2000 ppm (factory setting)

Shorting plug in the right position (R3)

VOC sensitivity " fast "

with QPM2160/2160D

• For the temperature measuring range:

−35...+35 °C

and QPM2162/2162D

 Shorting plug in the left position (R1) Shorting plug in the mid position (R2)

0...50 °C (factory setting)

... for output for all QPM...

01 02 O3

4...20 mA DC 0...10 V DC 0...5 V

...for the active test function

Shorting plug for the measuring range in the horizontal positions: The signal output delivers the values according to table "Test function active".

... for selection of the temperature unit on the display

• For the unit of temperature:

- Jumper in the vertical, right position = °C (factory setting)

 Jumper in the vertical, left position = °F

Behavior in the event of fault

QPM1100

• In the event of VOC failure, DC 10 V or 5 V or 20 mA will be present at signal output X1 (after 60 seconds)

QPM2...

• In the event of CO₂ failure, DC 10 V or 5 V or 20 mA will be present at signal output X1 (after 60 seconds)

QPM2102/2102D

 In the event of CO₂ or VOC failure, DC 10 V or 5 V or 20 mA will be present at signal output X2 (after 60 seconds)

QPM2160/2160D

 Should the temperature sensor become faulty, 0 V or 0 mA will be present at signal output X2

QPM2162/2162D

- Should the temperature sensor become faulty, 0 V or 0 mA will be present at signal output X3, and the humidity signal at signal output X2 will increase to DC 10 V or 5 V or 20 mA (after 60 seconds)
- Should the humidity sensor become faulty, DC 10 V or 5 V or 20 mA will be present at signal output X2 (after 60 seconds), and the temperature signal will remain active

Display of measured values

With sensors type QPM2102D, QPM2160D and QPM2162D, the measured values can be read on an LCD. The following measured values are displayed:

- CO₂: In ppm

- CO₂ + VOC: As a bar chart: 4 bars \triangleq X2 = 2 V or 1 V or 7,2 mA

– Temperature: In °C or °F - Humidity: In % r.H.

Accessories

	i e
Name	Type reference
Filter cap (for replacement)	AQF3101

Engineering notes

To power the sensor, a transformer for safety extra low-voltage (SELV) with separate windings for 100 % duty is required. When sizing and protecting the transformer, local safety regulations must be complied with.

When sizing the transformer, the power consumption of the duct sensor must be taken into consideration.

For correct wiring, refer to the Data Sheets of the devices with which the sensor is used.

The permissible cable lengths must be observed.

Cable routing and cable selection

When laying the cables, it must be observed that the longer the cables run side by side and the smaller the distance between them, the greater the electrical interference. Shielded cables must be used in environments with EMC problems.

Twisted pair cables are required for the secondary supply lines and the signal lines.

Mounting notes

Mounting location and orientation

To ensure degree of protection IP54 resp. IP65, the sensor must be fitted with the cable entry pointing downward!

The sensor should be mounted in locations where it can be easily accessed for service.

Note!

- If used in connection with steam humidifiers, the distance to the humidifier must be a minimum of 3 m. If permitted by the installation, the distance should be as great as possible, but no more than 10 m
- The sensing elements in the immersion rod are susceptible to impact and shock. Any impact or shock should therefore be avoided

7/12

•	The sensor must not be mounted in ventilation plant on top of a building (impact of
	solar radiation)! To ensure correct operation, the sensor's ambient temperature must
	lie in the range of –5+45 °C

Mounting instructions

Mounting Instructions are enclosed in the package.

Commissioning notes

Checking the CO₂ function

Checking the

VOC function

The sensor's functions can be checked 30 minutes after applying power:

- In well ventilated rooms, the sensor shows the CO₂ concentration of the outside air.
 Typically, this is 360 ppm (the sensor's measuring accuracy must be considered). Also, a basic functional check can be made by exhaling on the sensor. In that case, it must be taken into account that the sensor's rate of response has been purposely delayed (time constant t₆₃ = 5 min)
- Touch the sensor with a cotton ball dowsed in alcohol (e.g. gas from a cigarette lighter, without lighting a flame)

Ventilation should start when the preset switching level of the connected controller is reached.

Disposal



The device is considered electrical and electronic equipment for disposal in terms of the applicable European Directive and may not be disposed of as domestic garbage.

- Dispose of the device via the channels provided for this purpose.
- Comply with all local and currently applicable laws and regulations.

Technical data

Power supply	Operating voltage	AC 24 V ±20 % or DC or	1535 V (SELV)
		AC/DC 24 V class 2 (U	S)
	Frequency	50/60 Hz at AC 24 V	
	External supply line protection (EU)	Fuse slow max. 10 A	
		or Circuit breaker max. 13 Characteristic B, C or Power source with curr	
	Power consumption	At "U" output signal	"I" output signal
	QPM1100	Max. <1.6 VA	Max. <3.5 VA
	QPM2100, QPM2180, QPM2160, QPM2160D	Max. <0.9 VA	Max. <3.2 VA
	QPM2102, QPM2102D	Max. <1.8 VA	Max. <3.9 VA
	QPM2162, QPM2162D	Max. <0.9 VA	Max. <3.4 VA
Cable lengths for measuring signal	•		the device
Functional data "CO ₂ "	Measuring range	02000 ppm	
	Measuring accuracy at 23 °C and 1013 hPa	≤±(50 ppm + 2 % of me	easured value)
	Temperature dependency in the range of -545 °C	±2 ppm / °C (typically)	
	Long-time drift	≤±5% of measuring range / 5 years (typically)	
	Time constant t ₆₃	<5 min	
	Output signal, linear (terminal X1)	DC 010 V	
		420 mA	pm, max. 500 Ohm
	Recalibration-free	8 years	
Functional data "VOC"	Measuring range	0100% VOC	
	Time constant t ₆₃ VOC (CO ₂ see above)	<13 min (R1), <3.5 min	(R2), <1 min (R3)
8/12			

	Output signal, linear (terminal X1)	DC 010 V or DC 05 V $\stackrel{\frown}{=}$ 0100%, max. ±1 mA 420 mA $\stackrel{\frown}{=}$ 0100 %, max. 500 Ohm
Functional data "Maximum selection of CO ₂ and VOC" with QPM2102 and	Output signal, linear (terminal X2)	DC 010 V or DC 05 V $\stackrel{\frown}{=}$ max. of 02000 ppm, CO ₂ or 0100% VOC, max. ± 1 mA
QPM2102D		420 mA
	Range of use	095 % r.h. (noncondensing)
Functional data "r.h."	Measuring range	0100 % r.h.
with QPM2162D	Measuring accuracy at 23 °C and DC 24 V	
	095 % r.h.	±5 % r.h.
	3070 % r.h.	±3 % r.h. (typically)
	Time constant t ₆₃	Approx. 20 s
	Output signal, linear (terminal X2)	DC 010 V or DC 05 V ≙
		0100 % r.h., max. ±1 mA
		420 mA
Functional data "Tempera-	Range of use	−5+45 °C
ture" with QPM2160/	Measuring range	050 °C (R2)
QPM2160D and QPM2162/	g.	or – 35+35 °C (R1)
QPM2162D	Measuring accuracy at DC 24 V in the range of	, ,
	23 °C	±0.3 K (typically)
	1535 °C	±0.6 K
	−35+50 °C	±1 K
	Time constant	<3.5 min. in with 2 m/s moved air
	Output signal, linear (terminal X2 or X3)	DC 010 V or DC 05 V ≘
	,	050 °C / -35+35 °C max. ±1 mA
		$420 \text{ mA} \triangleq 050 \text{ °C}, /-35+35 \text{ °C},$
		max. 500 Ohm
Functional data "Tempera-	Sensing range	See "Mode of operation"
ture" with QPM218	Measuring accuracy	See "Mode of operation"
	Time constant t ₆₃	<3.5 min. at 2 m/s of circulated air
	Output signal (terminal B, M)	Passive
Air velocity	Max. air velocity V _{max.}	10 m/sec.
Degree of protection	Protection degree of housing	IP65 according to EN 60529
	QPM2102D, QPM2160D, QPM2162D	in the built-in state
	QPM1100, QPM2100, QPM2102, QPM2160,	IP54 according to EN 60529
	QPM2162, QPM2180	in the built-in state
	Protection class	III according to EN 60730-1
Electrical connections	Screw terminals for	1 × 2.5 mm² or 2 × 1.5 mm²
Environmental conditions	Operation to	IEC 60721-3-3
Environmental conditions	Climatic conditions	Class 3K3
	Temperature (housing incl. electronics)	050 °C
	Humidity	095 % r.h. (noncondensing)
	Mechanical conditions	Class 3M2
	Transport to	IEC 60721-3-2
	Climatic conditions	class 2K3
	Temperature	−25+70 °C
	Humidity	<95 % r.h.
	Mechanical conditions	Class 2M2
Materials and colors	Base	Polycarbonate, RAL 7001 (silver-grey)
	Cover	Polycarbonate, RAL 7035 (light-grey)
	Immersion rod	Polycarbonate, RAL 7001 (silver-grey)
	Filter cap	Polycarbonate, RAL 7001 (silver-grey)
	Mounting flange	PA66 – GF35 (black)
	Cable entry gland	PA, RAL 7035 (light-grey)
	-	9/12
-	Dust six quality senses ODM44 ODM94	CE4N40C2av

Directives and Standards

Sensor (complete assembly)	Silicone-free
Packaging	Corrugated cardboard
Product standard	EN 60730-1
	Automatic electrical controls for household and similar use
Electromagnetic compatibility (Applications)	For use in residential, commerce, light-industrial and industrial environments
EU Conformity (CE)	CE1T1962xx*)
RCM Conformity	CE1T1961en_C1 *)
UL	UL 873, http://ul.com/database
	*1

Environmental compatibility

The product environmental declaration CE1E1962*) contains data on environmentally compatible product design and assessments (RoHS compliance, materials composition, packaging, environmental benefit, disposal).


Weight


Incl. packaging		
QPM1100, QPM2100, QPM2102	Approx. 0.25 kg	
QPM2160, QPM2162, QPM2180	Approx. 0.25 kg	
QPM2102D	Approx. 0.27 kg	
QPM2160D, QPM2162D	Approx. 0.27 kg	


ppm = parts per million (number of parts per one million parts)

Connection terminals


QPM1100 G G G G G R1 = VOC R2 = VOC R3 = VOC + VOC R3 = VOC + R2 = VOC R3 = DC 0...10 V O3 = DC 0...5 V








QPM2160/2160D





^{*)} The documents can be downloaded from http://siemens.com/bt/download.

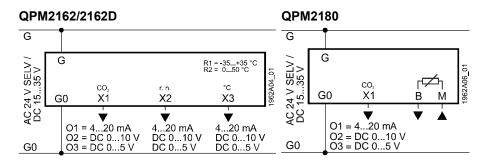


G Sytem voltage AC 24 V (SELV) or DC 15...35 V
G0 System ground and measuring neutral
X1 Signal output DC 0...10 V or DC 0...5 V
X2 Signal output DC 0...10 V or DC 0...5 V
X3 Signal output DC 0...10 V or DC 0...5 V
B, M Passive temperature output (interchangeable)


Dimensions

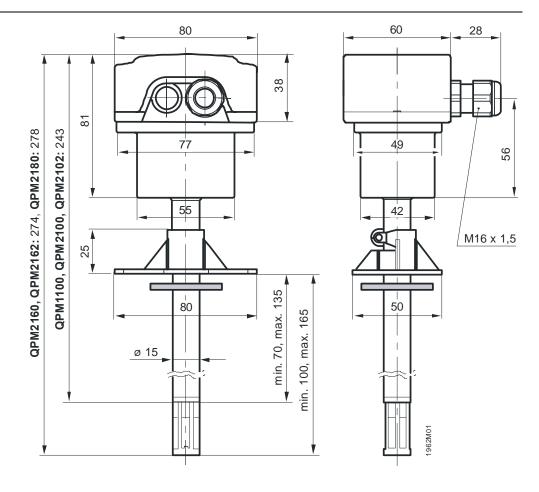



Drilling plan

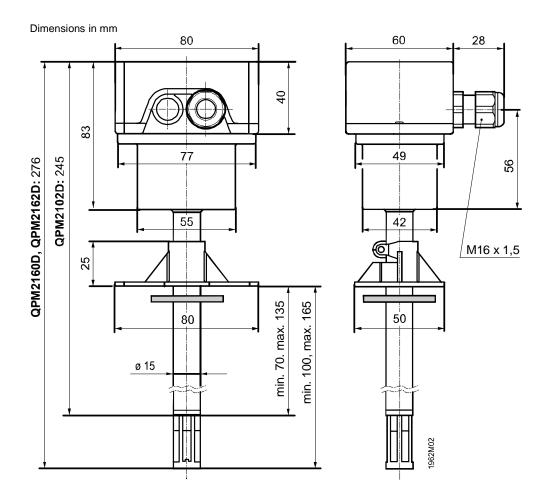



Dimensions in mm

Issued by
Siemens Switzerland Ltd
Smart Infrastructure
Global Headquarters
Theilerstrasse 1a
CH-6300 Zug
Tel. +41 58 724 2424
www.siemens.com/buildingtechnologies

© Siemens Switzerland Ltd, 2005 Technical specifications and availability subject to change without notice.